

Steca Power Tarom

2070, 2140, 4055, 4110, 4140

Specially designed for industrial and outdoor applications, the Steca Power Tarom comes with an IP 65 casing made of powder-coated steel.

This solar charge controller is capable of regulating large systems at three voltage levels (12 V, 24 V, 48 V). The Steca Power Tarom is based on the technology of the Steca Tarom controller. When connected in parallel, several controllers from this series can be operated via a standard DC bus in a simple solar home system or a hybrid system.

ADVANCED



Quality made in Germany

Product features

- Shunt topology with MOSFETs
- State of charge determination with Steca AtonIC (SOC)
- Automatic detection of voltage
- PWM control
- Multistage charging technology
- Load disconnection depending on SOC
- Automatic load reconnection
- Temperature compensation
- Negative earthing of one or positive earthing of several terminals possible
- Integrated data logger (energy meter)
- Integrated self test
- Monthly equalisation charge

Electronic protection functions

- Overcharge protection
- Deep discharge protection
- Reverse polarity protection of module, load and battery
- Reverse polarity protection by internal fuse
- Automatic electronic fuse
- Short circuit protection of load and module
- Overvoltage protection at module input
- Open circuit protection without battery
- Reverse current protection at night
- Overtemperature and overload protection
- Load disconnection on battery overvoltage

Displays

- Text LCD display

Operation

- Simple menu-driven operation
- Programming by buttons
- Manual load switch

Interfaces

- RJ45 interface to PA Tarcom / PA HS200

Options


- External temperature sensor (included)
- Alarm contact

Certificates

- Approved by the World Bank for Nepal
- Fit for use in tropical areas (DIN IEC 68 part 2-30)
- Compliant with European Standards (CE)
- Made in Germany
- Developed in Germany
- Manufactured according to ISO 9001 and ISO 14001

Accessories

- Data logger Steca PA Tarcom
- Data cable Steca PA CAB1 Tarcom
- Current sensor Steca PA HS200
- External temperature sensor Steca PA TS10

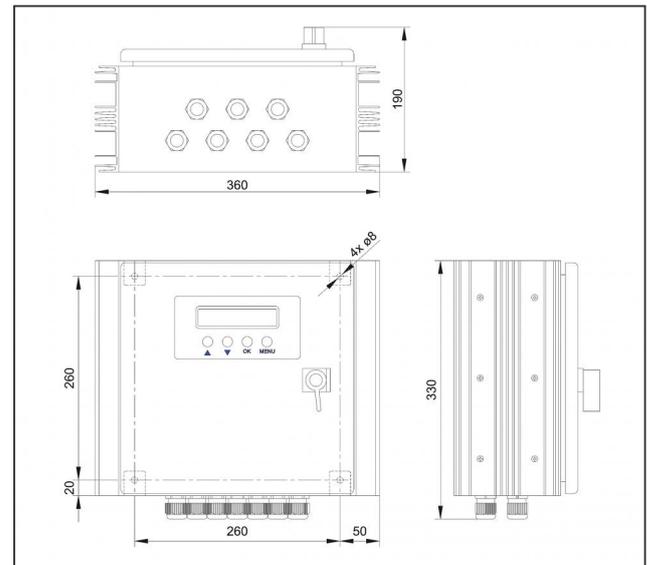

| | 2070 | 2140 | 4055 | 4110 | 4140 |
|--|------------------------------|------------------------------|----------------------------|-----------------------------|------------------------------|
| Characterisation of the operating performance | | | | | |
| System voltage | 12 V (24 V) | 12 V (24 V) | 48 V | 48 V | 48 V |
| Own consumption | 14 mA | | | | |
| DC input side | | | | | |
| Open circuit voltage solar module (at minimum operating temperature) | < 50 V | < 50 V | < 100 V | < 100 V | < 100 V |
| Module current | 70 A | 140 A | 55 A | 110 A | 140 A |
| DC output side | | | | | |
| Load current | 70 A | 70 A | 55 A | 55 A | 70 A |
| Reconnection voltage (SOC / LVR) | > 50 % / 12.6 V (25.2 V) | > 50 % / 12.6 V (25.2 V) | > 50 % / 50.4 V | > 50 % / 50.4 V | > 50 % / 50.4 V |
| Deep discharge protection < 30 % (SOC / LVD) | < 30 % / 11.1 V (22.2 V) | < 30 % / 11.1 V (22.2 V) | < 30 % / 44.4 V | < 30 % / 44.4 V | < 30 % / 44.4 V |
| Battery side | | | | | |
| End-of-charge voltage | 13.7 V (27.4 V) | 13.7 V (27.4 V) | 54.8 V | 54.8 V | 54.8 V |
| Boost charge voltage | 14.4 V (28.8 V) | 14.4 V (28.8 V) | 57.6 V | 57.6 V | 57.6 V |
| Equalisation charge | 14.7 V (29.4 V) | 14.7 V (29.4 V) | 58.8 V | 58.8 V | 58.8 V |
| Set battery type | liquid (adjustable via menu) | | | | |
| Operating conditions | | | | | |
| Ambient temperature | -10 °C ... +60 °C | | | | |
| Fitting and construction | | | | | |
| Terminal (fine / single wire) | 50 mm ² - AWG 1 | 95 mm ² - AWG 000 | 50 mm ² - AWG 1 | 70 mm ² - AWG 00 | 95 mm ² - AWG 000 |
| Degree of protection | IP 65 | | | | |
| Dimensions (X x Y x Z) | 330 x 330 x 190 mm | 360 x 330 x 190 mm | 330 x 330 x 190 mm | 360 x 330 x 190 mm | 360 x 330 x 190 mm |
| Weight | 10000 g | | | | |

- Technical data at 25 °C / 77 °F
- Inverters must not be connected to the load output.

