



# Solar inverter

## **TRIO-5.8/7.5/8.5-TL-OUTD**

The all-in-one residential three-phase TRIO-5.8, 7.5 and 8.5 kW inverters deliver performance, ease of use and installation, monitoring and control. With their 98% peak efficiency and wide input voltage range, the residential TRIO inverter means flexible installations and powerful output.

**From 5.8 to 8.5 kW**

**Commercial grade engineering at residential scale**

The topology of the larger, commercial TRIO inverters has been redesigned to ensure that the TRIO-5.8/7.5/8.5 models also enjoy high conversion efficiency across a wide range of input voltages. Optional integrated dataloggers and smart grid functionality, remote firmware updating and elegantly simple sliding front covers make these all-in-one devices easy to install and maintain. In short, they are commercial grade engineering at residential scale.

**Inverters packed with powerful features**

The double maximum power point tracker (MPPT) gives maximum installation flexibility for an optimal energy production (TRIO-7.5/8.5 models). This line of inverters can integrate power control, monitoring functionalities and environmental sensor inputs, without requiring external components.


TCP/IP connectivity can be also added by plugging in an optional expansion board (Ethernet or Wi-Fi) for providing data logging functionality for monitoring the main parameters of the plant as well as advanced O&M operations both locally (with the integrated webserver) and remotely (with the AV Plant Portfolio Manager portal), via a LAN connection.

The outer cover with its natural cooling mechanism qualifies at IP65 environmental protection level for external use. It provides maximum reliability and ease of installation, with a sliding front panel giving access to the connection and configuration area without requiring the complete removal of the cover.

**Highlights**

- Three-phase bridge topology for DC/ AC output converter
- Transformerless topology
- Two independent MPPT channels for TRIO-7.5/8.5 allow optimal energy harvesting from two sub-arrays oriented in different directions (one MPPT channel for TRIO-5.8)
- Flat efficiency curves ensure high efficiency at all output levels enabling consistent and stable performance across the entire input voltage and output power range
- Wide input voltage range
- Remote inverter upgrade
- Reactive power management
- DC switch version available (-S)
- Natural convection cooling for maximum reliability
- Outdoor enclosure for unrestricted use under any environmental conditions (IP65)
- Sliding cover for the easiest installation and maintenance
- Data logger and smart grid functionalities integrated on expansion cards:
  - PMU expansion card option, with external sensor inputs for monitoring environmental conditions and additional RS-485 for Modbus protocol
  - Ethernet or VSN300 Wifi Logger card (optional) with integrated web server
  - Availability of auxiliary DC output voltage (24 V, 100 mA)

**TRIO-5.8/7.5/8.5-TL-OUTD string inverter block diagram**

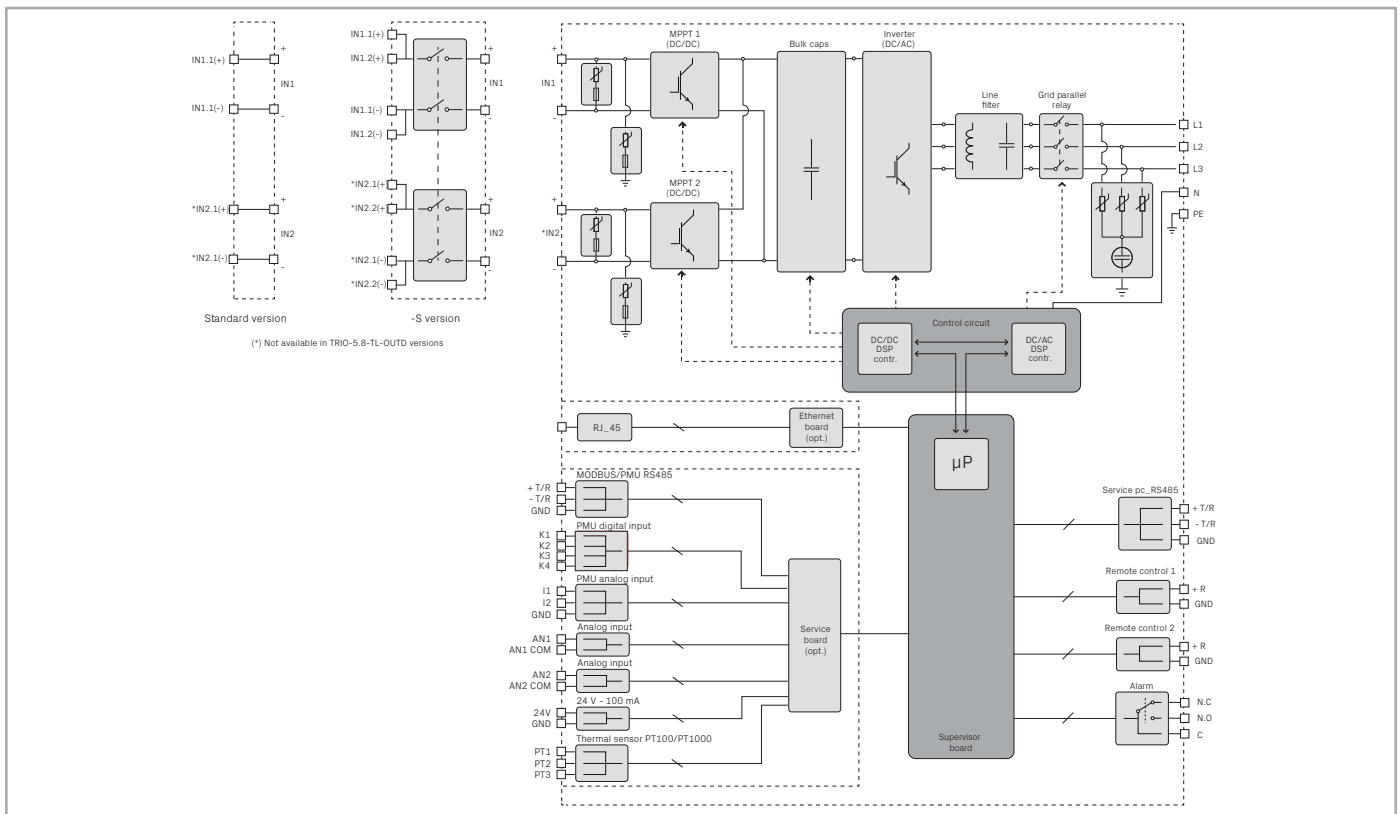

## Technical data and types

Type code	TRIO-5.8-TL-OUTD	TRIO-7.5-TL-OUTD	TRIO-8.5-TL-OUTD
<b>Input side</b>			
Absolute maximum DC input voltage ( $V_{\text{max,abs}}$ )		1000 V	
Start-up DC input voltage ( $V_{\text{start}}$ )		350 V (adj. 200...500 V)	
Operating DC input voltage range ( $V_{\text{dcmin}}...V_{\text{dcmax}}$ )		0.7 x $V_{\text{start}}...950$ V (min 200 V)	
Rated DC input voltage ( $V_{\text{dcr}}$ )		620 V	
Rated DC input power ( $P_{\text{dcr}}$ )	5950 W	7650 W	8700 W
Number of independent MPPT	1	2	2
Maximum DC input power for each MPPT ( $P_{\text{MPPTmax}}$ )	6050 W Linear derating from max to null [800 V ≤ $V_{\text{MPPT}} \leq 950$ V]	4800 W	4800 W
MPPT input DC voltage range ( $V_{\text{MPPTmin}}...V_{\text{MPPTmax}}$ ) at $P_{\text{acr}}$	320...800 V	-	-
DC input voltage range with parallel configuration of MPPT at $P_{\text{acr}}$	-	320...800 V	320...800 V
DC power limitation with parallel configuration of MPPT	-	Linear derating from max to null [800 V ≤ $V_{\text{MPPT}} \leq 950$ V]	
DC power limitation for each MPPT with independent configuration of MPPT at $P_{\text{acr}}$ , max unbalance example	-	4800 W [320 V ≤ $V_{\text{MPPT}} \leq 800$ V] the other channel: $P_{\text{dcr}}=4800$ W [215 V ≤ $V_{\text{MPPT}} \leq 800$ V]	4800 W [320 V ≤ $V_{\text{MPPT}} \leq 800$ V] the other channel: $P_{\text{dcr}}=4800$ W [290 V ≤ $V_{\text{MPPT}} \leq 800$ V]
Maximum DC input current ( $I_{\text{dcmax}}$ ) / for each MPPT ( $I_{\text{MPPTmax}}$ )	18.9 A	30.0 A / 15.0 A	30.0 A / 15.0 A
Maximum input short circuit current for each MPPT	24.0 A	20.0 A	20.0 A
Number of DC input pairs for each MPPT		2 (-S version)	
DC connection type	PV quick fit connector <sup>1)</sup> on -S version / Screw terminal block on standard version		
<b>Input protection</b>			
Reverse polarity protection		Yes, from limited current source	
Input over voltage protection for each MPPT - varistor		Yes, 4	
Photovoltaic array isolation control		According to local standard	
DC switch rating for each MPPT (version with DC switch)		16 A / 1000 V, 25 A / 800 V	
<b>Output side</b>			
AC grid connection type	Three-phase 3W+PE or 4W+PE		
Rated AC power ( $P_{\text{acr}} @ \cos\phi=1$ )	5800 W	7500 W	8500 W
Maximum apparent power ( $S_{\text{max}}$ )	5800 VA	7500 VA	8500 VA
Rated AC grid voltage ( $V_{\text{acr}}$ )		400 V	
AC voltage range		320...480 V <sup>2)</sup>	
Maximum AC output current ( $I_{\text{acr,max}}$ )	10.0 A	12.5 A	14.5 A
Contributory fault current	12.0 A	14.5 A	16.5 A
Rated output frequency ( $f_i$ )		50 Hz / 60 Hz	
Output frequency range ( $f_{\text{min}}...f_{\text{max}}$ )		47...53 Hz / 57...63 Hz <sup>3)</sup>	
Nominal power factor and adjustable range	> 0.995, adj. ± 0.9 with $P_{\text{acr}}=5.22$ kW, ± 0.8 with max 5.8 kVA	> 0.995, adj. ± 0.9 with $P_{\text{acr}}=6.75$ kW, ± 0.8 with max 7.5 kVA	> 0.995, adj. ± 0.9 with $P_{\text{acr}}=7.65$ kW, ± 0.8 with max 8.5 kVA
Total current harmonic distortion		< 2%	
AC connection type	Screw terminal block, cable gland M32		
<b>Output protection</b>			
Anti-islanding protection		According to local standard	
Maximum external AC overcurrent protection	16.0 A	16.0 A	20.0 A
Output overvoltage protection - varistor		4 plus gas arrester	
<b>Operating performance</b>			
Maximum efficiency ( $\eta_{\text{max}}$ )		98.0%	
Weighted efficiency (EURO/CEC)	97.4% / -	97.5% / -	97.5% / -
Feed in power threshold	32 W	36 W	36 W
Night consumption		< 3 W	
<b>Communication</b>			
Wired local monitoring	Ethernet card with webserver (opt.), PVI-USB-RS232_485 (opt.)		
Remote monitoring	Ethernet card (opt.), VSN300 Wifi Logger Card (opt.), VSN700 Data Logger (opt.)		
Wireless local monitoring	VSN300 Wifi Logger Card (opt.)		
User interface	Graphic display		

## Technical data and types


Type code	TRIO-5.8-TL-OUTD	TRIO-7.5-TL-OUTD	TRIO-8.5-TL-OUTD
<b>Environmental</b>			
Ambient temperature range	-25...+60°C / -13...140°F with derating above 50°C/122°F		
Relative humidity	0...100% condensing		
Sound pressure level, typical	50 dBA @ 1 m		
Maximum operating altitude without derating	2000 m / 6560 ft		
<b>Physical</b>			
Environmental protection rating	IP65		
Cooling	Natural		
Dimension (H x W x D)	641mm x 429 mm x 220 mm/ 25.2" x 16.9" x 8.7" (855 mm x 429 mm x 237 mm/ 33.7" x 16.9" x 9.3" with open front cover)		
Weight	25.0 kg / 55.1 lbs	28.0 kg / 61.7 lbs	28.0 kg / 61.7 lbs
Mounting system	Wall bracket		
<b>Safety</b>			
Isolation level	Transformerless		
Marking	CE (50 Hz only), RCM		
Safety and EMC standard	EN 62109-1, EN 62109-2, AS/NZS3100, EN 61000-6-2, EN 61000-6-3, EN 61000-3-2, EN 61000-3-3		
Grid standard (check your sales channel for availability)	CEI 0-21, CEI 0-16, DIN V VDE V 0126-1-1, VDE-AR-N 4105, G83/2, G59/3, RD 1699, RD 413, NRS-097-2-1, AS 4777, IEC 61727, IEC 62116, VFR 2014		
<b>Available products variants</b>			
Standard	TRIO-5.8-TL-OUTD-400	TRIO-7.5-TL-OUTD-400	TRIO-8.5-TL-OUTD-400
With DC switch	TRIO-5.8-TL-OUTD-S-400	TRIO-7.5-TL-OUTD-S-400	TRIO-8.5-TL-OUTD-S-400

1) Please refer to the document "String inverters – Product manual appendix" available at [www.fimer.com](http://www.fimer.com) for information on the quick-fit connector brand and model used in the inverter  
2) The AC voltage range may vary depending on specific country grid standard)


3) The Frequency range may vary depending on specific country grid standard

**Remark. Features not specifically listed in the present data sheet are not included in the product**

### Efficiency curves of TRIO-5.8-TL-OUTD

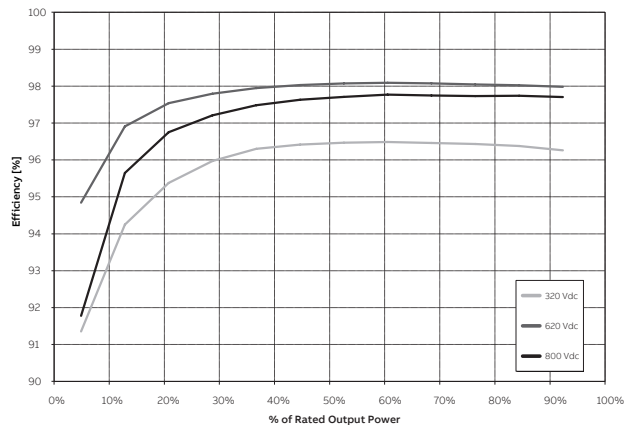

### Efficiency curves of TRIO-8.5-TL-OUTD

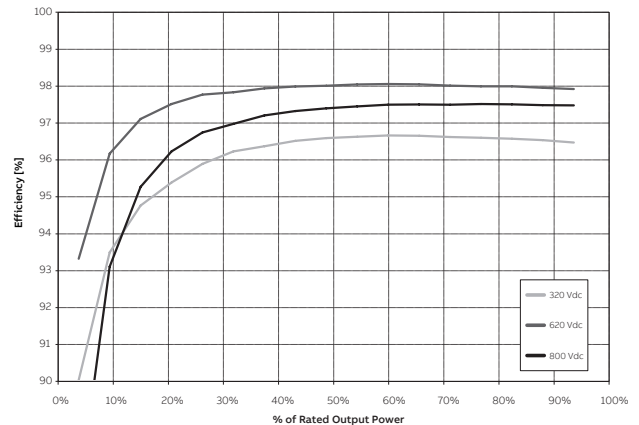

For more information please contact your local FIMER representative or visit:

[fimer.com](http://fimer.com)

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. FIMER does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of FIMER. Copyright© 2020 FIMER. All rights reserved.

