



Technical data sheet

Eco 120M (370-375 Wp)

Glass-foil module Best price-performance ratio


With the Eco models, SOLARWATT offers affordable, robust, high-performance solar modules of proven quality. They are durable and high-yielding as well as resistant to weather effects and environmental influences.

The Eco-modules are produced on state-of-the-art production lines and meet the high SOLARWATT quality standards. They will therefore generate solar power well beyond their warranty period.

The modules come with a solid ten-year product guarantee, with FullCoverage insurance even twelve years. FullCoverage insures almost all risks and takes effect if the modules do not produce electricity or deliver less than expected in the event of damage.

Product Quality

- ammonia resistant
- salt mist resistant
- LeTID tested
- 100 % plus-sorting
- 100 % PID protected

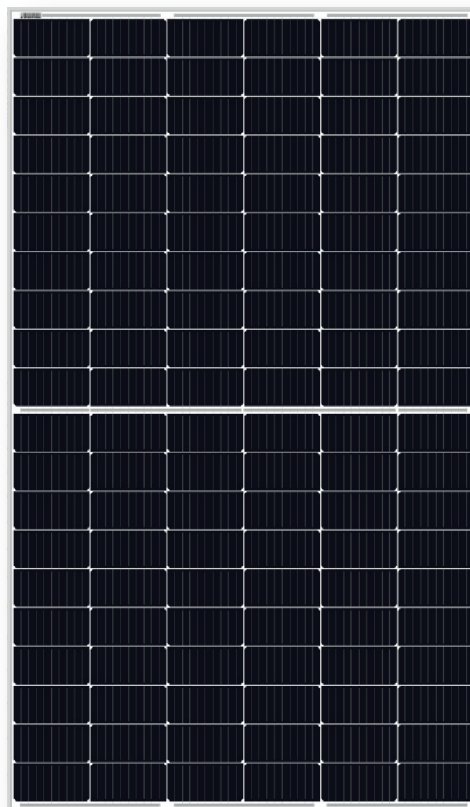

Service

FullCoverage insurance
optional (up to 1,000 kWp*)

Simple returns policy
as per „Delivery terms for
SOLARWATT solar modules“

12 Year Product Warranty
as per „Warranty conditions for SOLARWATT
solar modules“

25 Year Performance Warranty
on 80 % of nominal power as per „Warranty
conditions for SOLARWATT solar modules“

* country-specific deviations apply

Operating temperature range	-40 ... +85 °C
Ambient temperature range	-40 ... +45 °C
Temperature coefficient $P_{\max}$	-0,37 %/K
Temperature coefficient V_{OC}	-0,27 %/K
Temperature coefficient I_{SC}	0,04 %/K
NMOT	44 °C