


LUNA2000-215-2S10

Smart String ESS



More Energy

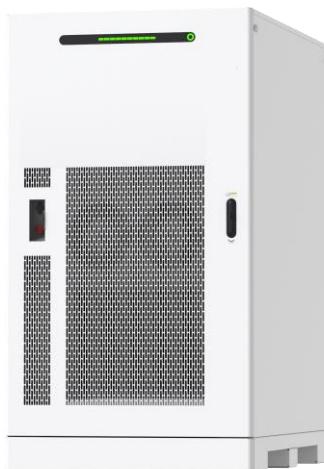

Simple O&M



Safe & Reliable

Energy Storage System Parameters

| | |
|-----------------------------------|--|
| Model type | LUNA2000-215-2S10 |
| Rated capacity | 215.0kWh |
| Maximum cycle rate | 0.5 CP |
| Maximum cycle efficiency | 91.3% |
| Depth of charge and discharge | 0~100% |
| Dimensions (W x D x H) | 1150mm×1800mm×2100mm |
| Weight | ≤ 2.8 T |
| Operating temperature range | -30 °C ~ 55 °C (> 50°C Derating) |
| Storage temperature range | -35 °C ~ 60 °C |
| Operating humidity range | 0 ~ 100% (non-condensing) |
| Maximum operating altitude | 4,000 m |
| System temperature control mode | Hybrid cooling |
| Balance mode | Active balance |
| SOC calibration mode | Automatic |
| Fire suppression mode | Pack-level oxygen barrier, Directional gas exhaust, Top explosion vent, Aerosol |
| Auxiliary power supply | 176~300 Vac, single phase, ≤5 kW |
| Power consumption standby | ≤150 W |
| Communication port | Ethernet / Optical fiber |
| Communication protocol | Modbus TCP |
| Protection degree | IP55 |
| EMC protection rating | Class B |
| Noise (rated operating condition) | ≤65 dB(A) |
| Lightning protection | Type II (AC port) |
| Protection mode | Anti-islanding protection, residual current detection, insulation resistance detection, AC overcurrent protection, and AC cable connection protection |
| Environment | RoHS6 |
| Certification standards | UL9540A; UL1973; UN38.3; IEC 62477-1; IEC 62040-1; IEC 61000-6-1/2/3/4; IEC 62619; IEC 60529; VDE-AR-E 2510-2/50; IEC 62933-5-1/2; IEC 61727; EN 50549; GB/T 34120 |

Battery Parameters (DC)

| | |
|------------------------------|-----------|
| Cell material | LFP |
| Rated battery capacity | 280Ah |
| System battery configuration | 240S1P |
| Number of battery packs | 4 |
| Operating voltage range | 648~864 V |
| Rated DC current | 140 A |

PCS Parameters (AC)

| | |
|---|--------------------------------------|
| PCS model type | PCS2000-108K-MB1 |
| Rated output power | 108 kW |
| Rated AC current | 155.9 A |
| AC voltage & frequency | 380 / 400 / 415 V (3P4W), 50 / 60 Hz |
| Adjustable power factor range | -1 ... +1 |
| AC current harmonics THDi (rated output power @on-grid) | ≤1.5 % |
| AC Voltage harmonics THDu (linear load @off-grid) | ≤2.0 % |

Note:

(1) * Rated operating condition: In the on-grid scenario, the ambient temperature is 25°C, the charge/discharge rate is 0.5 CP, and the AC output voltage is 400 Vac.