

AMTRON® STANDARD E

WALLBOX FOR ELECTRIC VEHICLES





MENNEKES AMTRON® designed for private and semi-public use



Variants

Key switch

LED status display Reset function button

Standard E

Charging socket type 2 with hinged lie	d
--	---

Order no.

3,7 / 7,4 kW * 1358400 **11 / 22 kW** * 1358401



Charging socket with shutter (version "T2S")

Order no.

3,7 / 7,4 kW * 1358600 **11 / 22 kW** * 1358601



7,5 meter permanently connected charging cable with connector type 2 (version "C2")

Order no.

7,4 kW 1358203 **22 kW** 1358202



www.chargeupyourday.de MENNEKES | 2 T

^{*}If AMTRON is configured to more than 20A via the dip switches, all charging cables with less than ≤ 20A are rejected, which means that charging cannot be carried out. In this state only 32A cables are accepted.




Product features

- Overall
 - Charging acc. Mode 3 (IEC 61851)
 - Vehicle connectors and charging socket acc. IEC 62196
 - Charging capacity up to 22kW
 - Status information through LED info bar
 - Unlocking function in case of power failure (only for devices with charging socket type 2)
 - Integrated cable suspension
- Authorisation by key switch
- Reset function
- Enclosure
 - Enclosure made of AMELAN®




Assembly

Front view

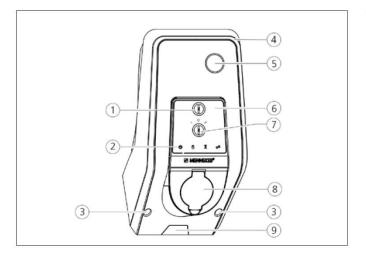

- 1. Reset button
- 2. LED Info bar
- 3. Fastening srews für upper housing part
- 4. Upper enclosure section
- 5. Inspection window for energy meter¹⁾
- 6. Front panel
- 7. Key switch
- 8. Charging socket type 2 with hinged lid 2)
- 9. Pre-cut recess for supply cable /cable duct
 - 1) not for Standard E variants
 - 2) depending on the variant

Rear view

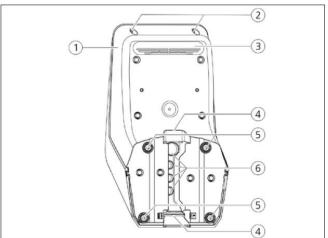

- 1. Lower enclosure part
- 2. Fastening screws for upper housing part
- 3. Passive ventilation
- 4. Recess for supply line/ cable duct
- 5. Fastening holes
- 6. Cable entries

www.chargeupyourday.de



Technical data


Type-dependent data		AMTRON® Standard E				
Rated voltage U _N [V] AC ± 10%		230	230	400	400	
Rated frequency f _N [Hz]		50				
Rated Current I _{nA} [A]		16	32	16	32	
Max. back-up fuse [A]		According to type label/ configuration				
Max. charging capacity mode 3 [kW]		3,7	7,4	11	22	
Rated current of charging point mode 3 Inc [A]		16 - 1 ph	32 - 1 ph	16 - 3 ph	32 - 3 ph	
Terminal strip supply line	Number of terminals	3	3	5	5	
	Rated cross section (mm²)	rigid 3 x 6 flexible 3 x 4	rigid 3 x 10 flexible 3 x 6	rigid 5 x 6 flexible 5 x 4	rigid 5 x 10 flexible 5 x 6	
	Tightening torque (Nm)	max. 0,8	max. 1,8	max. 0,8	max. 1,8	
Rated insulation voltage U _i [V]		500				
Rated impulse withstand voltage U _{imp} [kV]		4				
Rated short circuit current I _{CC} [kA]		10				
Rated diversity factor RDF		1				
Earth system		TN / TT				
EMC classifikation		A+B				
Protection class						
Degree of protection		IP 44: Permanently attached charging cable IP 54: Charging socket type 2 with hinged lid				
Overvoltage category		III				
Resistance to mechanical impact		IK 10				
Pollution degree		3				
Setting up		Indoor or outdoor				
Condition of installation		Stationary equipment				
Usage		AEVCS				
Mounting method		Wall mounted				
Dimensions H x W x D [mm]		475 x 259 x 220				
Weight [kg]		5 - 8,5				
Control fuse (MCB)		6A, 2p, characteristic B				
Load contactor			32A, 4p	16A, 4p	32A, 4p	
Standard		DIN EN 61851-1, DIN IEC / TS 61439-7				

Environmental conditions				
Ambient air temperature	-25+40 °C			
Average temperature within 24 hours	<35°C			
Altitude	Max. 2000m above sea level			
Relative humidity	Max. 95 % (non-condensing)			


www.chargeupyourday.de MENNEKES | 5



Dimensions [mm]

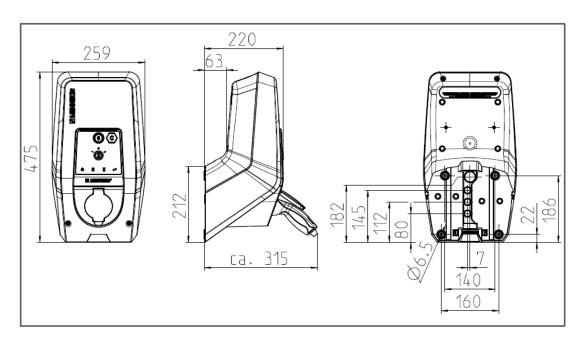

Mounting distance [mm]

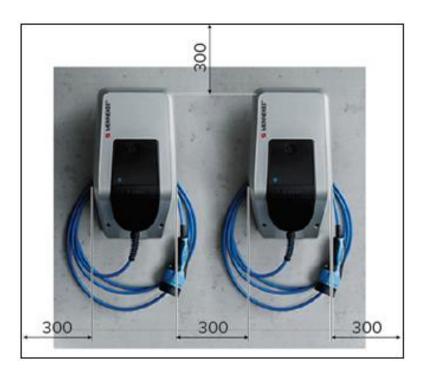

www.chargeupyourday.de MENNEKES | 6 T



MENNEKES

Elektrotechnik GmbH & Co. KG

Aloys-Mennekes-Straße 1 57399 KIRCHHUNDEM GERMANY

Phone: + 49 2723 41-1 Fax: + 49 2723 41-214 info@MENNEKES.de www.MENNEKES.com